


# TQMLX2160A

Arm® Family

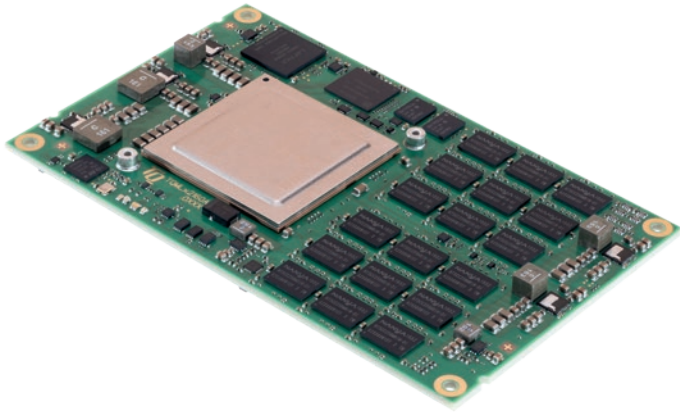

## HIGHLIGHTS

- ▶ 10G/100G Ethernet
- ▶ High-speed communication via 24x SerDes lanes
- ▶ DDR4 with ECC Support
- ▶ 100Gb/s Data Compression Engine
- ▶ 2x CAN FD, 2x USB 3.0, PCIe Gen3
- ▶ Integrated security functions


**Embedded Cortex®-A72 module based on LX2160 with enhanced data and networking performance.**

## TECHNICAL SPECIFICATION

<b>CPU</b>	LX2160, LX2120, LX2080
<b>Interfaces</b>	Up to 2x Ethernet 10/100/1000 Mbit Up to 2x 40/50/100 G-Ethernet Up to 16x 1/2.5/10/25 G-Ethernet Up to 2x USB 3.0 OTG interface Up to 2x UART Up to 2x CAN FD Up to 4x SATA 3.0
<b>Periphery interfaces</b>	Up to 2x SDIO/eMMC Up to 6x PCIe Gen3 (up to 24 lanes) Up to 6x I2C Up to 3x SPI Up to 1x QSPI (8-bit) Up to 32 GPIO
<b>Memory</b>	DDR4-SDRAM: Up to 64 GB Quad SPI NOR: Up to 512 MB eMMC Flash: Up to 64 GB EEPROM: 0/64-kbit

<b>Other</b>	Real Time Clock (RTC) Temperature sensor CPU JTAG interface Voltage Monitoring
<b>Power supply</b>	5 V
<b>Ambient conditions</b>	Standard temperature range: -25°C...+85°C Extended temperature range: -40°C...+85°C
<b>Dimensions</b>	126 mm x 78 mm
<b>Plug-in system</b>	Board-to-board plug-in system 560 pins 0.5 mm Pitch
<b>Operating systems</b>	Linux
<b>Operating systems on request</b>	VxWorks

## BLOCK DIAGRAM TQMLX2160A

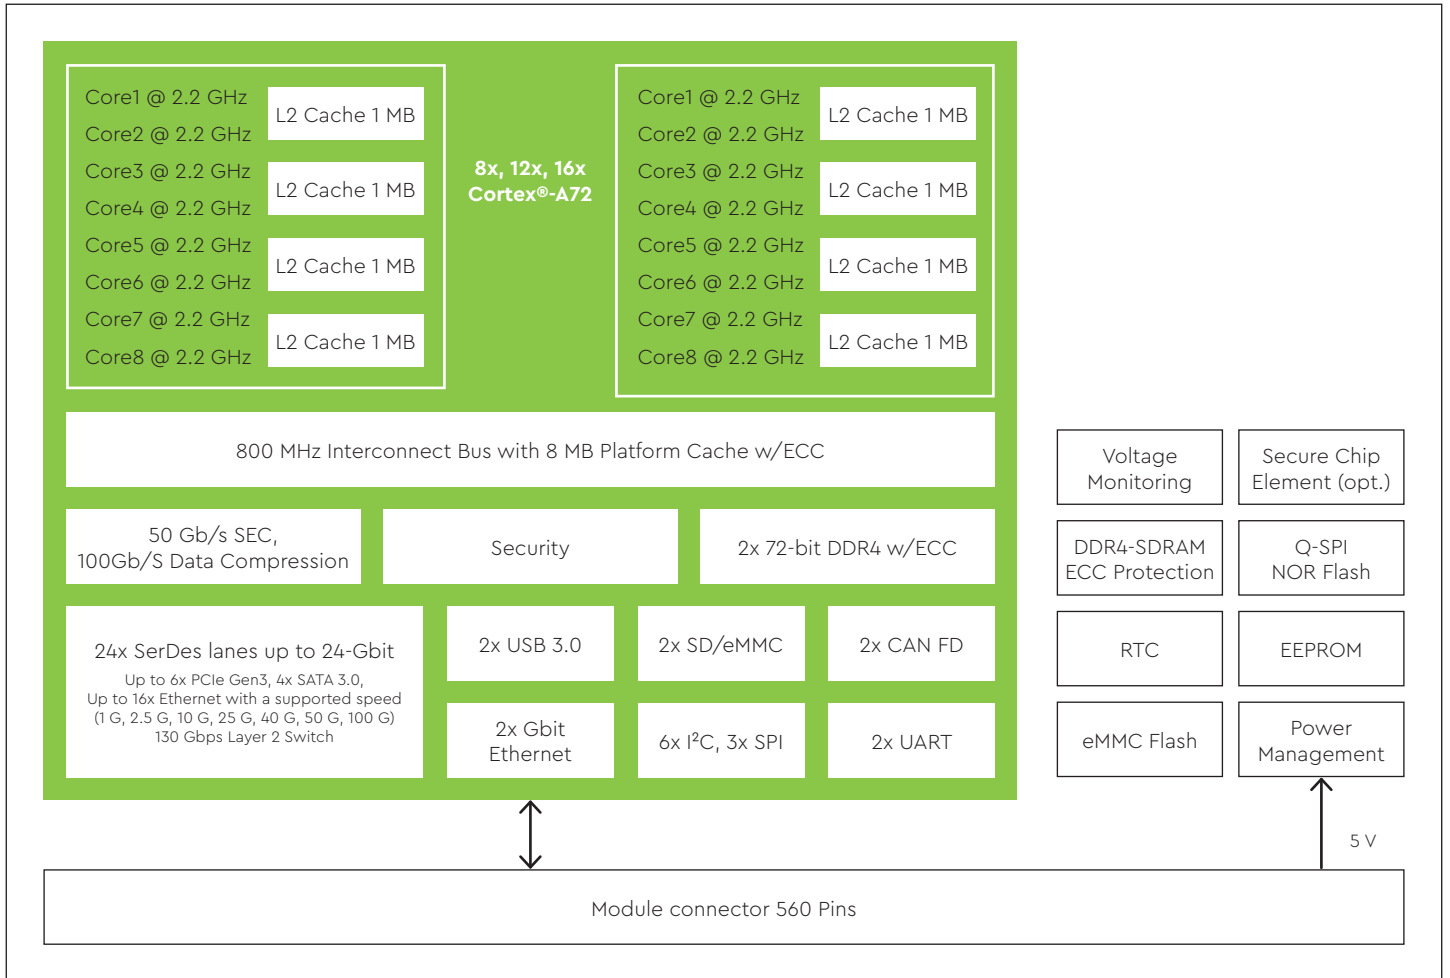

## ORDERING INFORMATION

**TQMLX2160A-AA** TQMLX2160A-AA, 16 Cortex®-A72/2.2 GHz, 8 GB eMMC Flash, 128 MB QSPI NOR, 32 GB DDR4, + ECC, 64 kB EEPROM, RTC, -40°C...+85°C

**TQMLX2120A-AA** TQMLX2120A-AA, 12 Cortex®-A72/2.2 GHz, 8 GB eMMC Flash, 128 MB QSPI NOR, 32 GB DDR4, + ECC, 64 kB EEPROM, RTC, -40°C...+85°C

**TQMLX2080A-AA** TQMLX2080A-AA, 8 Cortex®-A72/2.2 GHz, 8 GB eMMC Flash, 128 MB QSPI NOR, 32 GB DDR4, + ECC, 64 kB EEPROM, RTC, -40°C...+85°C

Other configurations on request

**STKLX2160A-AA** STKLX2160A (Eval Kit) with TQMLX2160A-AA, 16x Cortex®-A72/2.2 GHz, 32 GB DDR4, + ECC, 8 GB eMMC Flash, 64 kB EEPROM, RTC, 2x CAN FD separated, 2x USB 3.0 HOST, 10x ETH 10/100/1000, 2x 10 Gbit Ethernet, 1x 100 Gbit Ethernet, 2x PCIe Gen3 (x4), 1x Mini PCIe + SIM Card, 1x M.2 SATA, 1x SATA 2.5", 1x SD-Card, Temperature sensor, Reset-Button, Power Supply, 8 GB SD Card, Cables, Heatspreader, Heatsink

**Starterkit STKLX2160A set** The core of the STKaLX2160A set is the TQMLX2160A module with 16x Cortex®-A72 CPU. The components contained in the starter kit constitute a modular system enabling you to develop your own product ideas. Development of ultra-high speed interfaces can be started immediately by using the prepared combination of starter kit and available software. To develop your own hardware you can use the certified and qualified circuit components of the starter kit in your own designs.

### TQ-Systems GmbH

Mühlstraße 2 | Gut Delling | 82229 Seefeld | Germany  
Tel.: +49 8153 9308-0 | info@tq-group.com | tq-group.com

[tq-embedded.com](http://tq-embedded.com)